



Free-hanging

(rounded profile)


FRONT VIEW




BOTTOM VIEW

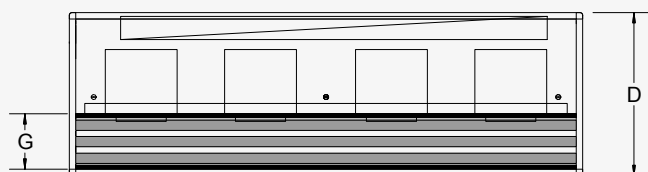

TOP VIEW

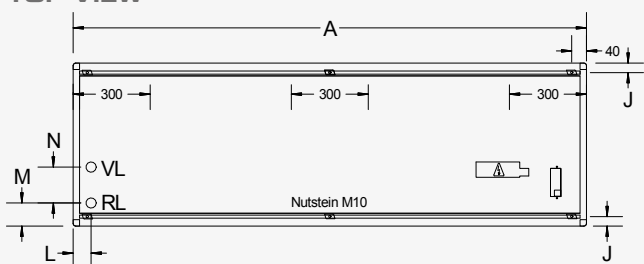

SIDE VIEW/SECTION

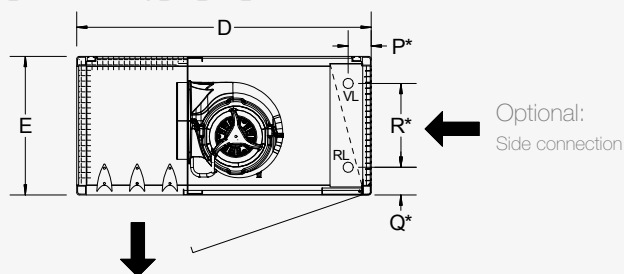

* WE RESERVE THE RIGHT TO MAKE TECHNICAL CHANGES

Technical dimensions

(free-hanging)

Model	2000	3000	4000	6000
A	Variable length			
D	635	765	815	870
E	300	380	400	550
F	250	330	350	500
G	210	240	260	325
J	38	38	38	38
L	70	70	70	70
M	90	100	100	130
N	140	180	180	180
P*	100	120	120	120
Q*	60	70	70	90
R*	170	210	230	350

Drawing
explanation

Technical dimensions

(AK - free hanging/ceiling-flush and Z - suspended ceiling)

Model	2000	3000	4000	6000
A	Variable length			
D	910	1120	1190	1395
E	300	380	400	550
F(AK)	250	330	350	500
F(Z)	240	320	340	490
G	210	240	260	325
J	38	38	38	38
K	559	689	741	794
L	70	70	70	70
M	365	455	475	655
N	140	180	180	180

Drawing
explanation

Connection-ready door air curtain unit. Ambient air intake from the room side. Freely accessible maintenance panel.



Suspension

Simple mounting thanks to the grooved tracks incorporated on the upper side of the unit.

Depending on the size of the unit, located within the grooved tracks are 4 to 6 sliding blocks with an M10 internal thread, for connection to 10 mm threaded rods. Thanks to the variable suspension points (within the grooved track), the unit is simple to install on site.